


LAMP[®]

DMF5-B BRACKET FOR DMF5 AND DMFH5 INSTALLATION MANUAL

Thank you for selecting our product. Before starting installation, please read this manual thoroughly to ensure correct installation. Please keep this manual at hand for future reference.




Cover is not included.

ABOUT THE PRODUCT

- Mounting bracket for DMF5 and DMFH5.
- Various connectors such as LAN connectors, USB connectors, and enclosed type cable cases can be assembled.

SPECIFICATIONS




■ Screw

Wood mounted : Binding head tapping screw 4×16···2 pcs (Included)

Metal mounted : Binding screw M4, Nut M4, and

Plain washers Nominal Size4 (Not included)

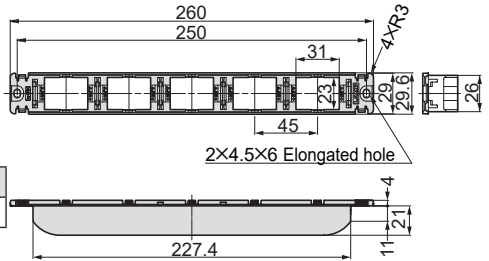

Item Code	Item name	Number of slots
210-046-312	DMF5-B	5

PRECAUTIONS FOR SAFETY

Precautions for installation

⚠ Caution If not followed injury or damage may result.

- ❗ Ensure the product is installed in a place that can withstand the weight of the product, and the insertion and removal of connectors.

Precautions for use


⚠ Caution If not followed injury or damage may result.

- 🚫 Do not paint the product to avoid damage.



INSTALLATION

1 Drilling dimensions

Surface mounted For DMF5

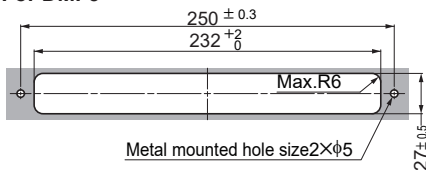


Recessed mounted For DMFH5





2 Assembly


[1]

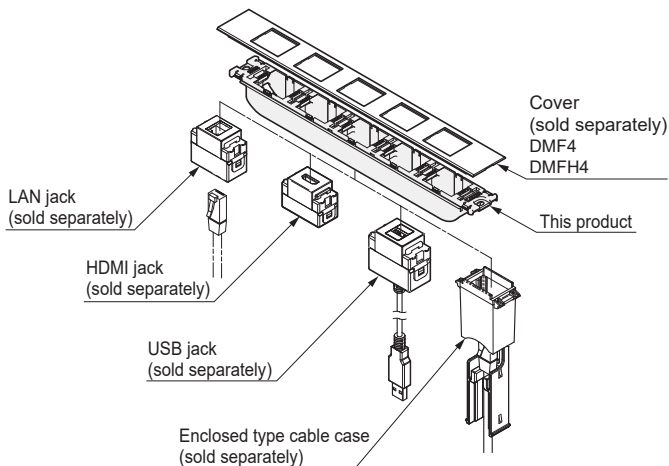

[2] Starting from either end, hook the jack onto the lip of the bracket and push until a click sound is heard.

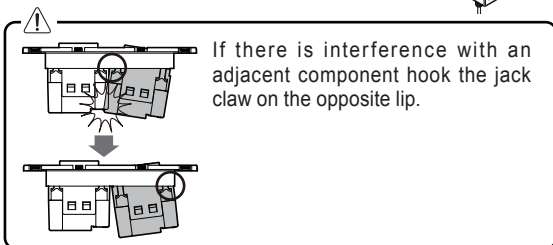


Removal of jack




Remove bracket from furniture.

- 1 Hold the jack.
- 2 Pry either of the bracket lips away from the jack.
- 3 Remove the jack.

[3] Mounting.
(For recessed mounted models)



[4] Push the cover in until a click sound is heard, Leave no gap between the cover and table top.



Removal of cover

Insert a flat-head screwdriver into either of the gaps (●) between the cover and tabletop. Pry to remove the cover.

